

Ficont Industry (Beijing) Co., Ltd.

No. 11 Tongji South Road,
Jingkai District, Beijing 100176, China

Tel: +86 10 69597866
info-china@3sindustry.com

3S Europe GmbH

Hein-Saß-Weg 21,
21129, Germany

Tel: +49 40 32518887
info@3SEurope.de

3S Lift India Private Limited

Workafella Business Center-51, Level 4, Tower A Rattha Tek Meadows Old
Mahabalipuram Road, Rajiv Gandhi Salai, Sholinganallur Chennai, Tamil Nadu,
India, 600119

Tel: +91 9600653379
info-india@3sindustry.com

24-hour customer service telephone : 400-002-4580

3S Americas, Inc.

2920 Telecom Parkway, Suite 400,
Richardson, TX 75082, USA

Tel: +1 972 849 3210
info@3SAmericas.com

3S Japan Co., Ltd.

13-106, 17-4-chome, Minamiaoyama,
Minato City, Tokyo 107-0062

Tel: +81 3-57863515
info-Japan@3sindustry.com



3S LIFT SELF-RETRACTING LIFELINE



www.3sindustry.com




Ficont industry (Beijing)Co., Ltd.(SH605305)

SEALED SELF-RETRACTING LIFELINE

15 meters
SRL-15S



25 meters
SRL-25S



Product Description

Preference offshore
Wind Power; Oil Exploitation; Shipping;
Mining; Fire Fighting

Rope specification

Φ 5 mm SUS316 wire rope

IP rating

IP68 / IP69K

Anti-corrosion grade

C5-M

Operating ambient temperature

-40 °C ~ +60 °C

Max. working length

15 m

25 m

Capacity

190 kg

190 kg

Max. arrest distance

≤ 1 m

≤ 1 m

Static strength

≥ 16 kN

≥ 16 kN

Weight

13.5 kg

24.8 kg

Dimensions

309 mm x 272 mm
x 145 mm

336 mm x 324 mm
x 220 mm

Certification

CE / GB / CSA /
ANSI / OSHA

CE/GB

SELF-RETRACTING LIFELINE

6 meters
SRL-06SA



8 meters
SRL-08SA



Product Description

Preference onshore
Onshore wind power; Shipping; Construction;
Rail transit; Warehouse logistics

Rope specification

Φ 5 mm SUS304 wire rope

Anti-corrosion grade

C4-H

Operating ambient temperature

-40 °C ~ +54 °C

Max. working length

6.2 m

7.5 m

Capacity

140 kg

140 kg

Max. arrest distance

≤ 1 m

≤ 1 m

Static strength

≥ 16 kN

≥ 16 kN

Weight

4.9 kg

5.0 kg

Dimensions


305 mm x 200 mm
x 116 mm

305 mm x 193 mm
x 116 mm

Certification

CE / ANSI / CSA

CE

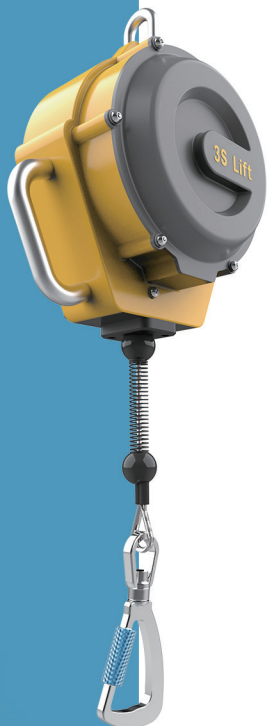

SRL-155 SELF-RETRACTING LIFELINE(SRL)

No Fear of Harsh Environments
Guardian of Working at Height

7 Advantages, No fear of harsh environments

REASONS FOR CHOOSING THE 3S LIFT SRL-155


- 1 IP68 and IP69K **for extreme environments.**
- 2 Passed 2000h corrosion resistance test, **the highest standards in the industry.**
- 3 All internal and external connections are made of **316 stainless steel.**
- 4 High strength aluminum alloy shell with **three layers of coating** to avoid corrosion.
- 5 **Greatly reduce arresting distance** to become more responsive and safer.
- 6 Capacity 190kg for personnel and equipment, **the highest standards in the industry.**
- 7 Obtained **domestic, European and North American certifications**, with users around the world.

HIGH STANDARD FOR INTERNAL AND EXTERNAL COMPONENTS MATERIAL

Housing and surface treatment:
Aluminum alloy & Three-layer coating
Exceed the C5-M anti-corrosion standard.

Sealing material: **Silicone**
For extreme harsh environments.
Upgraded corrosion resistance.

Wire rope: **316 stainless steel**
For corrosion protection with high requirements.

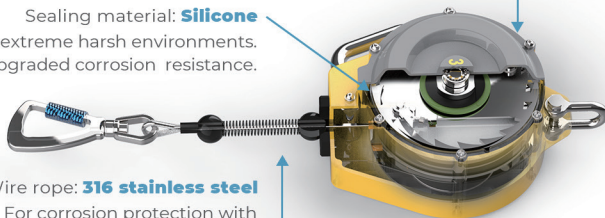

SRL-155 Self-retracting lifeline (SRL)

SUITABLE FOR ALL-WEATHER ENVIRONMENT AND ALL FIELDS



WIND POWER

Operation at heights offshore:

The harsh operating environment offshore and highly corrosive salt spray require extreme sealing and anti-corrosion performance for the SRL.

Not every SRL is suitable.



SHIPPING



OIL EXPLOITATION



MINING



FIRE FIGHTING



RAIL TRANSIT



CONSTRUCTION

Designed for both, onshore and offshore, the SRL-155 can operate in the harshest environments and rated to IP68 and IP69K.

The shell is made of high strength aluminum alloy coated with three layers to avoid corrosion.

RECOGNIZED BY DOMESTIC AND INTERNATIONAL CUSTOMERS



...
We are sincerely looking forward to cooperating with you.



SRL-15S SEALED SELF-RETRACTING LIFELINE

No Fear of Harsh Environments
Guardian of Working at Height